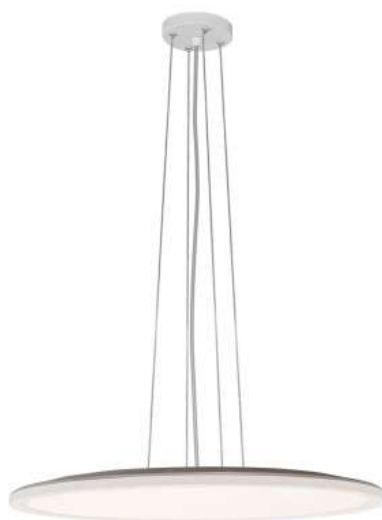


NYMPHEA FLAT DUO CCT

SLI031048CCT_PW

Plafond NYMPHEA FLAT DUO CCT with the possibility of changing the light color (CCT), with a power of 48 W, high light efficacy 130 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 3000 / 4000 / 6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. Suitable for both surface and suspended mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

CCT**IP54**


Power	48 W	Voltage	230 V
Luminous flux*	6200 lm (360°)	Colour temperature	3000 / 4000 / 6000 K
Colour of light	CCT	Beam angle	120 °
Degree of protection (IP)	IP54		

Technical data

Code	SLI031048CCT_PW
Power	48 W
Nominal current	210 mA
Voltage	230 V
Energy consumption	48 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.95
Useful luminous flux*	6200 lm (360°)
Luminous flux**	4800 lm (360°)
Lamp efficacy	130 lm/W
Colour temperature	3000 / 4000 / 6000 K
Colour of light	CCT
Beam angle	120 °
RA	80
Light source included	+
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 / +40 °
Warranty	2 years
Lifespan	17000 h
Housing material	Plastic
Degree of protection (IP)	IP54
Colour	White
Dimension (AxBxC)	500x26 mm
For use	Inside
Assembly method	On the ceiling, Suspended
Application	Inside
Made in	PRC
Other	Light color change function 3000K / 4000K / 6000K ,

Logistics data

Bulk packaging	10 pcs.
Quantity per pallet	120 pcs.
Gross weight (1 pcs.)	2.1 kg

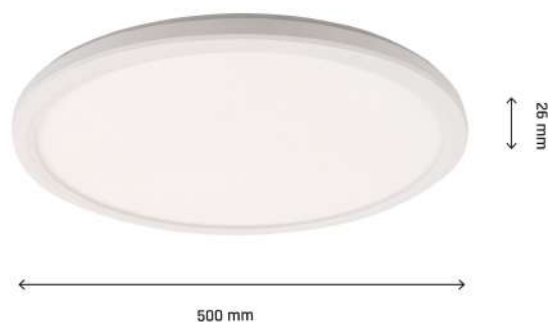

Related documents

 User manual Photometric file

