

# FIALE CORE COMPLETE

SLI043030CCT\_PW

Recessed lighting luminaire FIALE CORE COMPLETE with the possibility of changing the light color (CCT), with a power of 7 W. Thanks to the ability to change the color temperature (CCT) in the range 2700 / 4000 / 6000K, we can adjust the light color depending on our needs and preferences. Narrow beam angle 45° gives directional light so that selected objects or surfaces can be better exposed. Designed for recessed mounting.

CCT

|                    |                         |
|--------------------|-------------------------|
| Power              | <b>7 W</b>              |
| Colour temperature | <b>2700/4000/6000 K</b> |
| Beam angle         | <b>45 °</b>             |


|                           |              |
|---------------------------|--------------|
| Voltage                   | <b>230 V</b> |
| Colour of light           | <b>CCT</b>   |
| Degree of protection (IP) | <b>IP20</b>  |

## Technical data

|                           |                                                    |
|---------------------------|----------------------------------------------------|
| Code                      | SLI043030CCT_PW                                    |
| Power                     | 7 W                                                |
| Nominal current           | 46 mA                                              |
| Voltage                   | 230 V                                              |
| Energy consumption        | 7 kWh/1000h                                        |
| Frequency                 | 50HZ Hz                                            |
| Protection class          | II                                                 |
| Power factor              | 0.500000                                           |
| Useful luminous flux*     | 560 lm (90°)                                       |
| Luminous flux**           | 600 lm (360°)                                      |
| Lamp efficacy             | 80 lm/W                                            |
| Luminous intensity        | 600 cd                                             |
| Colour temperature        | 2700/4000/6000 K                                   |
| Colour of light           | CCT                                                |
| Beam angle                | 45 °                                               |
| RA                        | 80                                                 |
| Light source included     | +                                                  |
| Dimmable                  | No                                                 |
| Working temperature range | -20/+40 °                                          |
| Warranty                  | 2 years                                            |
| Lifespan                  | 17000 h                                            |
| (On/Off)                  | 15000                                              |
| Housing material          | Plastic                                            |
| Degree of protection (IP) | IP20                                               |
| Colour                    | White                                              |
| Dimension (AxBxC)         | 90x85 mm                                           |
| Mounting hole             | 75 mm                                              |
| For use                   | Inside                                             |
| Assembly method           | Recessed                                           |
| Application               | INT                                                |
| Made in                   | PRC                                                |
| Other                     | Light color change function<br>2700K/4000K/6000K , |

## Logistics data

|                       |           |
|-----------------------|-----------|
| Bulk packaging        | 40 pcs.   |
| Quantity per pallet   | 1120 pcs. |
| Gross weight (1 pcs.) | 0.1 kg    |

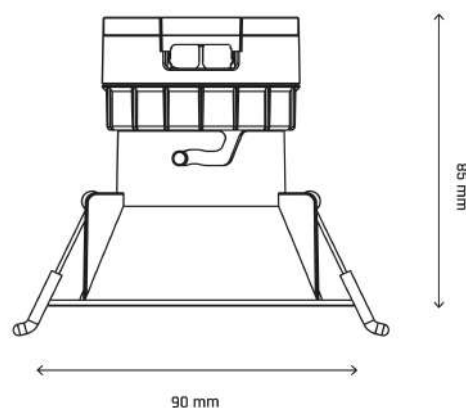

## Related documents

 User manual Declaration of Conformity Photometric file

